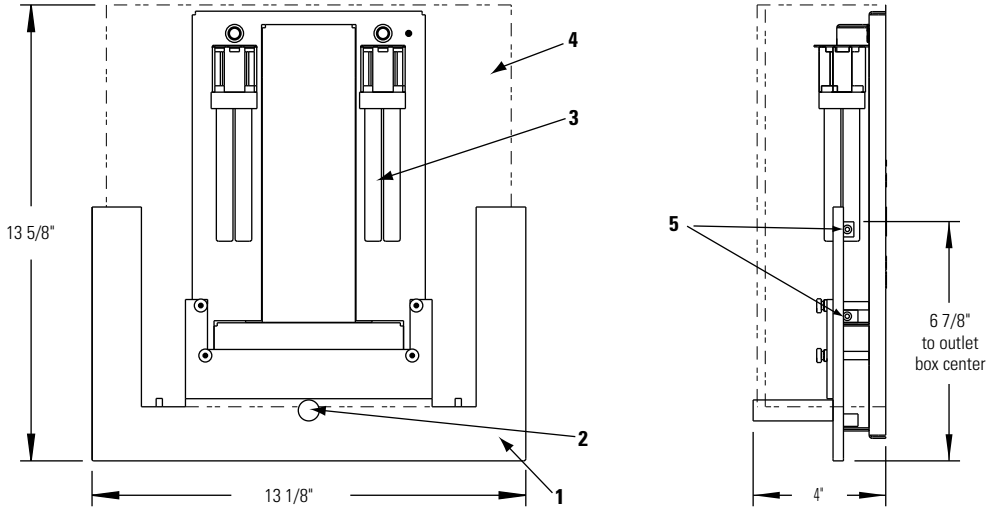

Complete Luminaire consists of Diffuser and Backplate Assembly. Order each separately.

Diffuser Ordering Information

Cat. No.	Pattern/Description/Color
40871	Rolled "Rain" pattern texture, Silk-screened White/Clear
40865	Three Dimensional "Squares" White/Clear Silk-screened Pattern
40862	"Ceramic White" Silk-screened and Sandblasted

Backplate Assembly Ordering Information

Cat. No.	Finish	Cat. No.	Finish	Lamps	Ballast Type	Input Voltage
40828U	Satin Brass	**40829U**	Satin Nickel	2x18W Quad 4-Pin G24d-2 base CF18DT/E/IN/* PL-C18W/*/4P F18D8X/SPX*/4P	1-2 Lt. Electronic	120V/277V
40828D1	Satin Brass	**40829D1**	Satin Nickel		1-2 lt. Electronic Dimmable	120V

*Designates manufacturer's color temperature.

Features

1. **Diffuser Holder:** Die-cast zinc alloy. Satin brass or satin nickel finish with clear lacquer.
2. **Diffuser Support Peg:** Turned brass. Satin brass or satin nickel finish with clear lacquer.
3. **Lamps:** Quad tube compact fluorescent, by others. See chart above for wattage and base type,.
4. **Diffuser:** 6mm thick (Max.) Glass. See chart above for options.
5. **Screw:** Nylon. 8-32. To secure Diffuser.

Mounting

Mounts directly to 4" outlet box or switch box, using wallplate supplied.

Electrical

Ballasts	Electronic 120V/277V Unv.	Electronic 120V Dimmable
Total Input Watts:	40	34
Max. Line Current:	.34/.15	0.28
Power Factor:	>.98	High
Ballast Factor:	>.98	0.8-0.9
THD:	<10%	<10%
Starting Temp:	-18°C (0°F)	50°F

Labels

UL listed suitable for damp locations.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®

Hallway / Footcandles

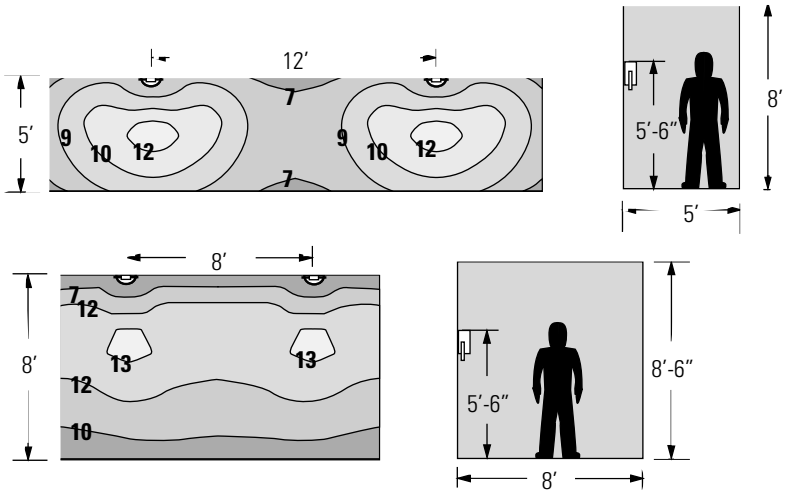

Vestibule / Conference Room / Footcandles

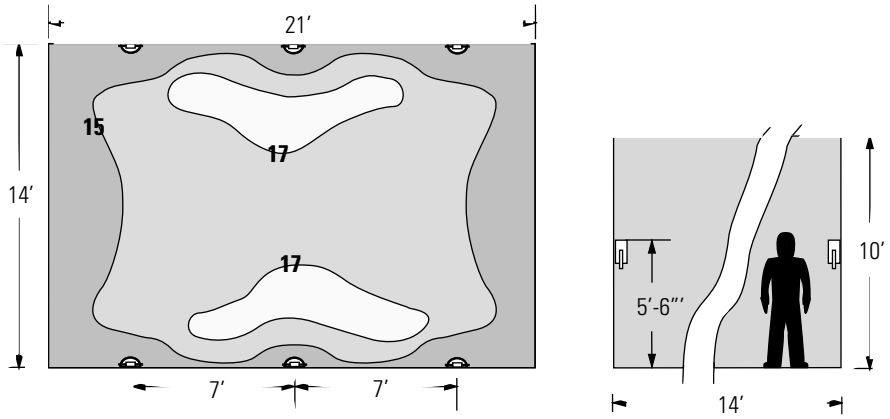

Reflectances

80% ceiling / 50% wall / 20% floor
Footcandles are on floor.

Multiplier Factors

Data shown is based on an "All White" lightshield.

Lamp Specification

Lamp	Average Initial Lumens	Average Life Hrs.
18W QT	1250	10,000

Annual Energy Cost Savings

Compact Fluorescent	vs. Incandescent	24 hrs. / Day	10 hrs. / Day
2 -18W QT	2-60W T10	$68	$29 @ 10¢ /KWH

Job Information **Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®